GDA2020 MGA
E 402887.465
N 6349136.187

SHEET 2
(REVISED)

CLEARING AREA: 0.47 ha
TOTAL TREES: 41
- TREES 0.2m DIA = 19
- TREES 0.3m DIA = 13
- TREES 0.4m DIA = 6
- TREES 0.5m DIA = 3

TREE1, TREE2, TREE3, TREE4, TREE5, TREE6, TREE7, TREE8, TREE9, TREE10, TREE11, TREE12, TREE13, TREE14, TREE15, TREE16, TREE17, TREE18, TREE19, TREE20, TREE21, TREE22 (INSIDE R/R), TREE23, TREE24, TREE25, TREE26, TREE27, TREE28, TREE29, TREE30, TREE31, TREE32, TREE33, TREE34, TREE35, TREE36, TREE37, TREE38, TREE39, TREE40, TREE41

ROAD RESERVE

REV.	AMENDMENT DESCRIPTION	DATE
1	CORRECT PROJECTION FILE APPLIED (MGA2020_Zone50.prj) TREES, CLEARING LINE & CADASTRE MOVED 1.79m	20-08-26

SHIRE OF HARVEY
102 Uduc Road
Harvey 6220
Ph (08) 9729 0300
shire@harvey.wa.gov.au

SCALE ~ 1:4,000 @ A3
DATUMS: GDA2020 MGA ZONE 50
(GPS: TIED INTO LANDGATE SSM HR 40)
0m 500m 1km 1.5km 2.0km

COMPILED: PNE
AUTHORISED: STEEN NIXON
DRAWN: P.EUSTACE
SURVEY: PNE
DATE: 20-08-26
TOPCON FILE: 26saddle trees MGA 2020 *Rev1*

DRAWING TITLE.

SADDLEBANK ROAD ~ HOFFMAN
RECONSTRUCTION
TREE SURVEY


DRAWING NO. HS060-26


REV. 1

ORIG SIZE A3 @ 1:4,000

SHEET 3 (REVISED)

TOTAL TREES: 41
- ○ TREES 0.2m DIA = 19
- ● TREES 0.3m DIA = 13
- ● TREES 0.4m DIA = 6
- ● TREES 0.5m DIA = 3

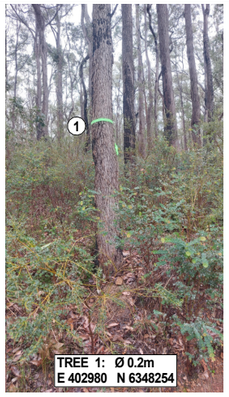

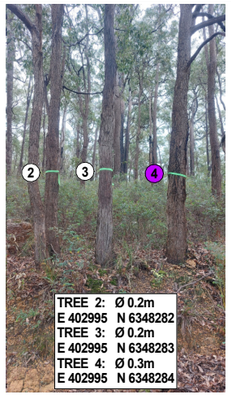










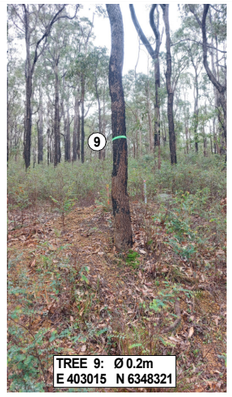


















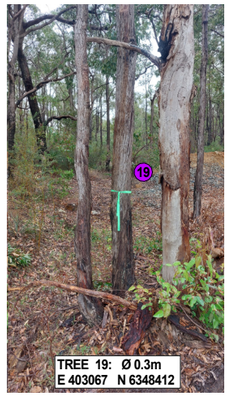











































REV.	AMENDMENT DESCRIPTION	DATE
1	CORRECT PROJECTION FILE APPLIED (MGA2020_Zone50.prj) TREES, CLEARING LINE & CADASTRE MOVED 1.79m	20-08-26

SHIRE OF HARVEY
102 Uduc Road
Harvey 6220
Ph (08) 9729 0300
shire@harvey.wa.gov.au

PHOTOS CAPTURED 17th AUGUST 2026

COMPILED: PNE	
AUTHORISED: STEEN NIXON	
DRAWN: P.EUSTACE	
SURVEY: PNE	
DATE: 20-08-26	
TOPCON FILE: 26saddle trees MGA 2020 *Rev1*	

DRAWING TITLE.

SADDLEBANK ROAD ~ HOFFMAN
RECONSTRUCTION
TREE SURVEY

DRAWING NO. HS060-26

REV. 1

ORIG SIZE A3